

Environmental Product Declaration



In accordance with ISO 14025:2006, EN 15804:2012+A2:2019/AC:2021, and ISO 21930:2017 for:

Formica Colorcore®2 Laminate *Formica Corporation*

by Nemho, center of excellence for innovation and technology for Arpa Industriale S.p.A., Formica Group, Homapal GmbH, Trespa International B.V. and Westag AG.



| | |
|--------------------------|---|
| Programme: | The International EPD® System, www.environdec.com |
| Programme operator: | EPD International AB |
| EPD registration number: | S-P-06976 |
| Publication date: | 2022-12-15 |
| Revision date: | 2023-01-17 (version 1) |
| Valid until: | 2027-12-11 |

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

| | |
|-------------------|---|
| Programme: | The International EPD® System |
| Address: | EPD International AB Box 210 60 SE-100 31 Stockholm Sweden |
| Website: | www.environdec.com |
| E-mail: | info@.environdec.com |

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14. CONSTRUCTION PRODUCTS. VERSION 1.2.4

PCR review was conducted by: the Technical Committee of the International EPD® System. Chair of the review is Claudia A. Peña. The review panel may be contacted via info@.environdec.com

Life Cycle Assessment (LCA)

LCA accountability: David Sette and Irmak Akal, Nemho

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006 via:

EPD verification by EPD Process Certification*

Internal auditor: Lara Naested, Nemho

Third-party verification: SGS Italia S.p.A. Via Caldera 21, 20153 Milano. (www.it.sgs.com) is an approved certification body accountable for third-party verification

Third-party verifier is accredited by: *Accredia, certificate n.006H*

*For EPD Process Certification, an accredited certification body certifies and reviews the management process and verifies EPDs published on a regular basis. For details about third-party verification procedure of the EPDs, see GPI v.4, Section 7.5.

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical

declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD: Nemho, Wetering 20, 6002 SM Weert

Contact: s.corrado@nemho.com

Description of the organisation:

Nemho is the Innovation Centre of the all material companies of the Broadview Holding Arpa Industriale, Trespa International, Formica, Homapal, Westag and DOS. Nemho carries out all sustainability-related activities, including LCA studies, for the above-mentioned companies.

Description of the manufacturing company:

Formica Corporation was founded in 1913 in Cincinnati, Ohio as The Formica Products Company by former Westinghouse engineers Daniel J. O'Conor and Herbert Faber. The two discovered high-pressure plastic resins could be used as an effective substitute "for mica" in electrical componentry, and with their invention, they created a new category of materials known as high-pressure laminate (HPL). By the 1930s, the Formica Products Company had shifted away from industrial applications to decorative surfaces. Formica® Brand Laminates became well known for its fashionable designs, durability and ease of cleaning, and Formica surfaces were broadly used in cafes, railway cars and ocean liners. Fast forward to today, the modern-day Formica Corporation remains committed to innovation and maintaining a leading position in design and manufacture of high quality HPL surfaces for applications ranging from health care to single-family homes, education to hospitality, retail to multi-family residences. Today, Formica Corporation operates manufacturing facilities in Cincinnati, Ohio and St. Jean-sur-Richelieu, Quebec along with a network of distribution warehouses across the United States, Canada and Mexico.

Product-related or management system-related certifications:

Formica brand laminate products conform to the following characteristics:

- FSC
- NSF/ANSI 35 High pressure Decorative Laminates for Food Surfacing Equipment
- Greenguard Gold
- ANSI/NEMA Standards

Name and location of production site(s): Formica Evendale (OHIO, US)

Product information

Product name: Formica Colorcore® 2 Laminate

Product identification: High pressure decorative panels (high-pressure laminates, HPL) are tested in accordance to the NEMA LD3-2005 standard.

Product description:

Formica Colorcore® 2 Laminate panels are decorative high-pressure panels (high-pressure laminates, HPL). HPL products comprise individual layers of natural fibres, treated with thermosetting resins and pressed under high pressure. The panels are attributed with an integrated decorative layer on one side of the panels. The decorative layer consist either on a decor paper impregnated with thermosetting melamine resin or a dry printed decor paper with an impregnated overlay. The core layers consist of a specific ColorCore filler with thermosetting melamine resin. ColorCore®2 by Formica Group, a unique surfacing material having the same color throughout, are intended for application to interior vertical or

horizontal surfaces where design, appearance, quality, durability and resistance to stain and heat from ordinary sources are required.

UN CPC code: n.a.

LCA information

Declared unit: 1 squared meter of finished panel, 0.034" thick, weighting 1.386 kg, plus primary packaging. All the possible product décor layers, different for the color and for the finishing, are covered by this EPD.

Reference service life: not applicable.

Time representativeness: Primary data were collected internally. The reference year is 2021.


Database(s) and LCA software used: The LCA study was performed with the support of the Simapro LCA software (version 9.3) and Ecoinvent 3.8 ad Carbon Minds database

Description of system boundaries:

Cradle to gate (A1-A3) with modules C1-C4 and module D (A1-A3 + C + D);

Formica produces Colorcore® 2 Laminate panels by pressing treated ColorCore filler (core) and the treated décor layers together. The décor layer constitutes of raw décor paper impregnated with melamine resin or print paper with impregnated overlay and the core constitutes of ColorCore filler impregnated with melamine resin.

System diagram:

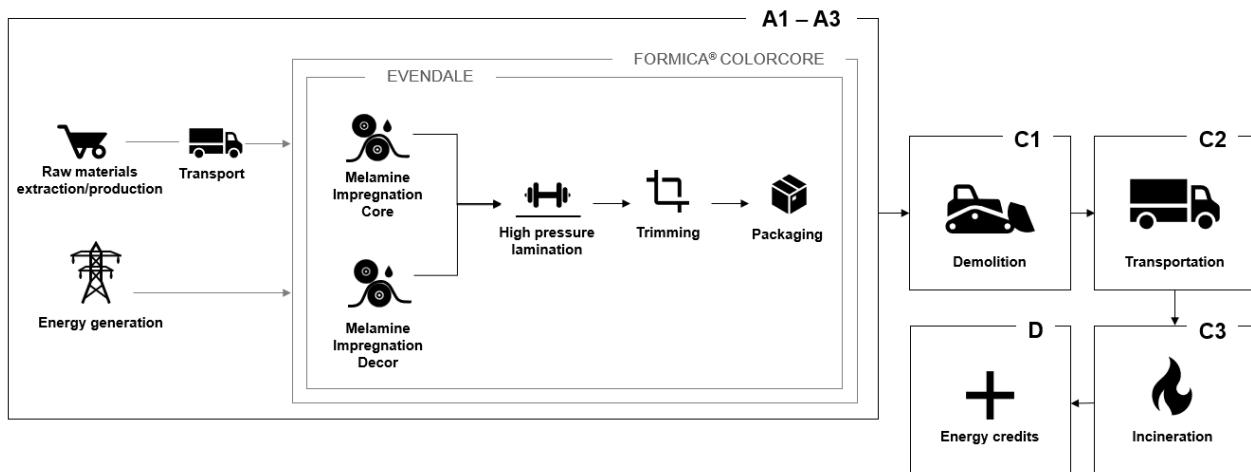

More information

Modelling of electricity in module A3:

A share (20.9%) of Formica Evendale electricity is purchased with Renewable Energy Certificates (RECs), which corresponds to 100% Hydroelectricity.

The remaining electricity for Formica Evendale is purchased as residual mix, which corresponds to 32.1% Coal, 30.7% Nuclear, 29.4% Gas, 4.8% Wind electricity, 1.1% Hydroelectricity, 0.8% Other fossil, 0.6% Biomass and 0.1% Other. Formica Evendale residual mix is modelled based on 2021 Green-e® Residual Mix for RFCW grid (RFC West/ Eastern Power Grid).

End of life scenario for Formica Colocore® 2 Laminate:

HPL panels are commonly used as secondary material for energy recovery, therefore it is assumed that 100% of the HPL panel at the end of life are sent to incineration. Loads from material incineration and resulted energy credits (module D) are declared. Energy credits are calculated considering a lower heating value (LHV) of panels equal to 19 MJ/kg as declared by ICDLI (2015).

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

| | Product stage | | | Construction process stage | Use stage | | | | | | | End of life stage | | | | Resource recovery stage | |
|----------------------|---------------------|-----------|---------------|----------------------------|-----------|---------------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|-------------------------|----------|
| | Raw material supply | Transport | Manufacturing | | Transport | Construction installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Modules declared | X | X | X | ND | ND | ND | ND | ND | ND | ND | ND | ND | X | X | X | X | X |
| Geography | GLO | GLO | USA | ND | ND | ND | ND | ND | ND | ND | ND | ND | GLO | GLO | GLO | GLO | GLO |
| Specific data used | >90% | | | | | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation – products | Not relevant | | | | | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation – sites | Not relevant | | | | | - | - | - | - | - | - | - | - | - | - | - | - |

Content information

| Product components | Weight, kg | Post-consumer material, weight-% | Biogenic material, weight-% and kg C/kg |
|---------------------|-----------------|----------------------------------|---|
| Core resin | 0.4676 ± 0.0094 | 0% | 0% and 0 kg C/kg |
| Paper | 0.8132 ± 0.0163 | 0% | 58.69 ± 1.17% and 0.576 ± 0.012 kg C/kg |
| Décor resin | 0.1047 ± 0.0021 | 0% | 0% and 0 kg C/kg |
| TOTAL | 1.3856 ± 0.0277 | 0% | 58.69 ± 1.17% and 0.576 ± 0.012 kg C/kg |
| Packaging materials | Weight. kg | Weight-% (versus the product) | Weight biogenic carbon. kg C/kg |
| Polycoat | 0.007 | 0.46% | 0.0% |
| TOTAL | 0.007 | 0.46% | 0.0% |

Dangerous substances from the candidate list of SVHC for Authorisation

Formica Colorcore® 2 Laminate panels do not contain substances listed on the candidate list of Substances of Very High Concern, as published on the ECHA website, in concentrations exceeding 0.1 percentage by mass.

Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804

| Results per functional or declared unit | | | | | | | |
|---|---|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-fossil | kg CO ₂ eq. | 1.04E+01 | 8.75E-02 | 1.29E-02 | 8.44E-01 | 0.00E+00 | -1.87E+00 |
| GWP-biogenic | kg CO ₂ eq. | -2.62E+00 | 0.00E+00 | 0.00E+00 | 2.93E+00 | 0.00E+00 | 0.00E+00 |
| GWP-luluc | kg CO ₂ eq. | 6.42E-03 | 1.61E-04 | 4.84E-06 | 1.22E-05 | 0.00E+00 | -1.99E-03 |
| GWP-total | kg CO ₂ eq. | 7.83E+00 | 8.77E-02 | 1.29E-02 | 3.77E+00 | 0.00E+00 | -1.87E+00 |
| ODP | kg CFC 11 eq. | 1.10E-06 | 2.89E-09 | 2.93E-09 | 3.49E-09 | 0.00E+00 | -1.57E-07 |
| AP | mol H ⁺ eq. | 5.95E-02 | 4.32E-04 | 6.56E-05 | 4.80E-04 | 0.00E+00 | -5.94E-03 |
| EP-freshwater | kg P eq. | 2.24E-03 | 4.11E-05 | 9.38E-07 | 1.08E-05 | 0.00E+00 | -5.03E-04 |
| EP-marine | kg N eq. | 9.86E-03 | 8.25E-05 | 2.22E-05 | 2.86E-04 | 0.00E+00 | -1.17E-03 |
| EP-terrestrial | mol N eq. | 9.98E-02 | 8.25E-04 | 2.43E-04 | 2.34E-03 | 0.00E+00 | -1.18E-02 |
| POCP | kg NMVOC eq. | 2.87E-02 | 2.23E-04 | 7.24E-05 | 5.69E-04 | 0.00E+00 | -3.45E-03 |
| ADP-minerals&metals* | kg Sb eq. | 6.25E-05 | 1.14E-07 | 2.96E-08 | 1.12E-07 | 0.00E+00 | -2.35E-06 |
| ADP-fossil* | MJ | 1.64E+02 | 1.14E+00 | 1.99E-01 | 3.68E-01 | 0.00E+00 | -2.64E+01 |
| WDP | m ³ eq. | 7.79E+00 | 1.39E-02 | 7.62E-04 | 4.00E-03 | 0.00E+00 | -1.73E-01 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential. Accumulated Exceedance; EP-freshwater = Eutrophication potential. fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential. fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential. Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential. deprivation-weighted water consumption | | | | | | |

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Potential environmental impact – additional mandatory and voluntary indicators

| Results per functional or declared unit | | | | | | | |
|---|------------|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-GHG ¹ | kg CO2 eq. | 1.09E+01 | 8.61E-02 | 1.28E-02 | 8.43E-01 | 0.00E+00 | -1.83E+00 |

Potential environmental impact – additional voluntary indicators. Results for North America calculated according to ISO 21930

| Results per functional or declared unit | | | | | | | |
|---|-----------------------|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP (ISO 21930) | kg CO2 eq. | 1.02E+01 | 8.49E-02 | 1.27E-02 | 8.43E-01 | 0.00E+00 | -1.80E+00 |
| ODP (ISO 21930) | kg CFC-11 eq. | 1.18E-06 | 3.45E-09 | 3.09E-09 | 3.67E-09 | 0.00E+00 | -1.69E-07 |
| EP (ISO 21930) | kg N eq | 2.91E-02 | 3.19E-04 | 1.37E-05 | 5.64E-04 | 0.00E+00 | -3.93E-03 |
| AP (ISO 21930) | kg SO2 eq | 4.83E-02 | 3.69E-04 | 5.82E-05 | 4.42E-04 | 0.00E+00 | -5.08E-03 |
| POCP (ISO 21930) | kg O ₃ eq. | 4.74E-01 | 4.65E-03 | 1.40E-03 | 1.35E-02 | 0.00E+00 | -6.72E-02 |

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product.

Use of resources

| Results per functional or declared unit | | | | | | | |
|---|---|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4.70E+00 | 1.13E-01 | 1.65E-03 | 6.20E-03 | 0.00E+00 | -1.39E+00 |
| PERM | MJ | 8.74E+01 | 1.76E-02 | 5.50E-04 | 3.00E-03 | 0.00E+00 | -2.17E-01 |
| PERT | MJ | 9.21E+01 | 1.31E-01 | 2.20E-03 | 9.20E-03 | 0.00E+00 | -1.60E+00 |
| PENRE | MJ | 1.47E+02 | 1.14E+00 | 1.99E-01 | 3.68E-01 | 0.00E+00 | -2.64E+01 |
| PENRM | MJ | 1.72E+01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PENRT | MJ | 1.64E+02 | 1.14E+00 | 1.99E-01 | 3.68E-01 | 0.00E+00 | -2.64E+01 |
| SM | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW | m ³ | 2.06E-01 | 6.35E-04 | 2.49E-05 | 2.77E-04 | 0.00E+00 | -7.86E-03 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | |

Waste production and output flows

Waste production

| Results per functional or declared unit | | | | | | | |
|---|------|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4.75E-02 | 4.18E-04 | 1.52E-05 | 1.03E-01 | 0.00E+00 | -5.16E-03 |
| Non-hazardous waste disposed | kg | 2.32E+00 | 5.53E-03 | 1.84E-02 | 4.97E-02 | 0.00E+00 | -7.40E-02 |
| Radioactive waste disposed | kg | 3.02E-04 | 3.54E-06 | 1.31E-06 | 7.95E-07 | 0.00E+00 | -4.36E-05 |

Output flows

| Results per functional or declared unit | | | | | | | |
|---|------|-----------|----------|----------|----------|----------|----------|
| Indicator | Unit | Tot.A1-A3 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Material for recycling | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for energy recovery | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy. electricity | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 5.21E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy. thermal | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.06E+01 | 0.00E+00 | 0.00E+00 |

Additional information

Reducing the carbon footprint is key to our overall sustainability policy and it is based on our core belief that it is the right thing to do. We are also convinced that reducing our overall environmental footprint is essential to the long-term success of our business and the environment around us. That is why sustainability is embedded in our business philosophy with the credo 'do no harm. do good. do better.' At the core of our sustainability strategy is the principle that we should start with ourselves when we seek to improve the world: 'do no harm.' Our approach is straightforward: we measure our impact. select targets to reduce this impact and monitor and report on progress. To measure our impact. we use the Life Cycle Assessment (LCA) methodology.

The second element of our strategy is to look for opportunities that support the environment beyond the direct scope of our own manufacturing footprint: 'do good.' This includes creating highly durable products that have a long lifespan that limit the need for replacement. Additionally. we will develop projects that absorb or reduce carbon emissions that are not directly linked to our factories or product portfolio. We believe that addressing sustainability challenges will allow our company to continue to grow and 'do better' in the future. Investing in sustainability should – in the end – ensure that these efforts go beyond established regulatory requirements and the net effect of our efforts will positively impact the environment in which we operate.

Further details on our philosophy. approach and goals can be found in our position paper available online. (<https://www.formica.com/en-us/campaigns/sustainability>).

Differences versus previous versions

- 2023-01-17
Updated frontpage picture

References

General Programme Instructions of the International EPD® System. Version 4
PCR 2019:14. CONSTRUCTION PRODUCTS. VERSION 1.2.4
ICDLI (2015). Technical characteristics and physical properties of HPL (Technical leaflet)
LCA Background report for Formica Colorcore® 2 Laminate



www.environdec.com