

Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Arpa HPL 0.9 mm (standard core) Arpa Industriale S.p.A.

by Nemho, center of excellence for innovation and technology for Arpa Industriale S.p.A.,
Formica Group, Homapal GmbH, Trespa International B.V. and Westag AG.

nemho next
material
house

Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-05985
Publication date:	2022-05-16
Valid until:	2027-04-13

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product category rules (PCR): PCR 2019:14. CONSTRUCTION PRODUCTS. VERSION 1.11
PCR review was conducted by: <i>IVL Swedish Environmental Research Institute (martin.erlandsson@ivl.se) and Secretariat of the International EPD® System</i>
Independent third-party verification of the declaration and data, according to ISO 14025:2006: <input checked="" type="checkbox"/> EPD process certification <input type="checkbox"/> EPD verification
Third party verifier: SGS Italia S.p.A. Via Caldera 21, 20153 Milano. www.it.sgs.com Accredited by: Accredia, certificate n.006H
Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD: Nemho, Wetering 20, 6002 SM Weert

Contact: s.corrado@nemho.com

Description of the organisation:

Nemho is the Innovation Centre of the all material companies of the Broadview Holding, i.e. Arpa Industriale (from now on referred as Arpa), Trespa International (from now on referred as Trespa), Formica, Homapal, Westag and DOS. Nemho carries out all sustainability-related activities, including LCA studies, for the above-mentioned companies.

Description of the manufacturing company:

Since 1954, Arpa has been designing and producing panels with high-quality HPL technology for the most varied end uses: from architecture to interior design, from health care to naval shipbuilding, from transportation to hospitality, from retail to kitchens. In 2013 Arpa launched FENIX®, an innovative material for interiors which was developed by an international, multidisciplinary team based on proprietary technologies.

Product-related or management system-related certifications: Arpa is, amongst other certification schemes, certified according to ISO 9001:2015 and FSC.

Name and location of production site(s): Arpa Industriale, Bra (Italy)

Product information

Product name: HPL (black core) 0,9 mm-thick

Product identification: High pressure decorative thin and solid panels (high-pressure laminates, HPL) tested in accordance with the European standard EN 438 part 2 and solid panels partially CE marked according to EN 438 part 7.

Product description: Arpa panels are decorative thin and solid laminates.

HPL panels comprise individual layers of natural fibres, treated with thermosetting resins and pressed by simultaneous application of heat and pressure, in order to obtain a homogeneous non-porous high density product. The panels are attributed with an integrated decorative layer on one side of the panels. The backside is sanded.

UN CPC code: Not available.

LCA information

Declared unit: 1 squared meter of finished panel 0,9-mm thick, weighting 1,238 kg, plus primary packaging

Reference service life: Not applicable

Time representativeness: Primary data were collected internally. The reference year is 2020.

Database(s) and LCA software used: The LCA study was performed with the support of the Simapro LCA software (version 9.3), and Ecoinvent 3.8 and Carbon Minds (October 2021 release) database.

Description of system boundaries: Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D)

System diagram:

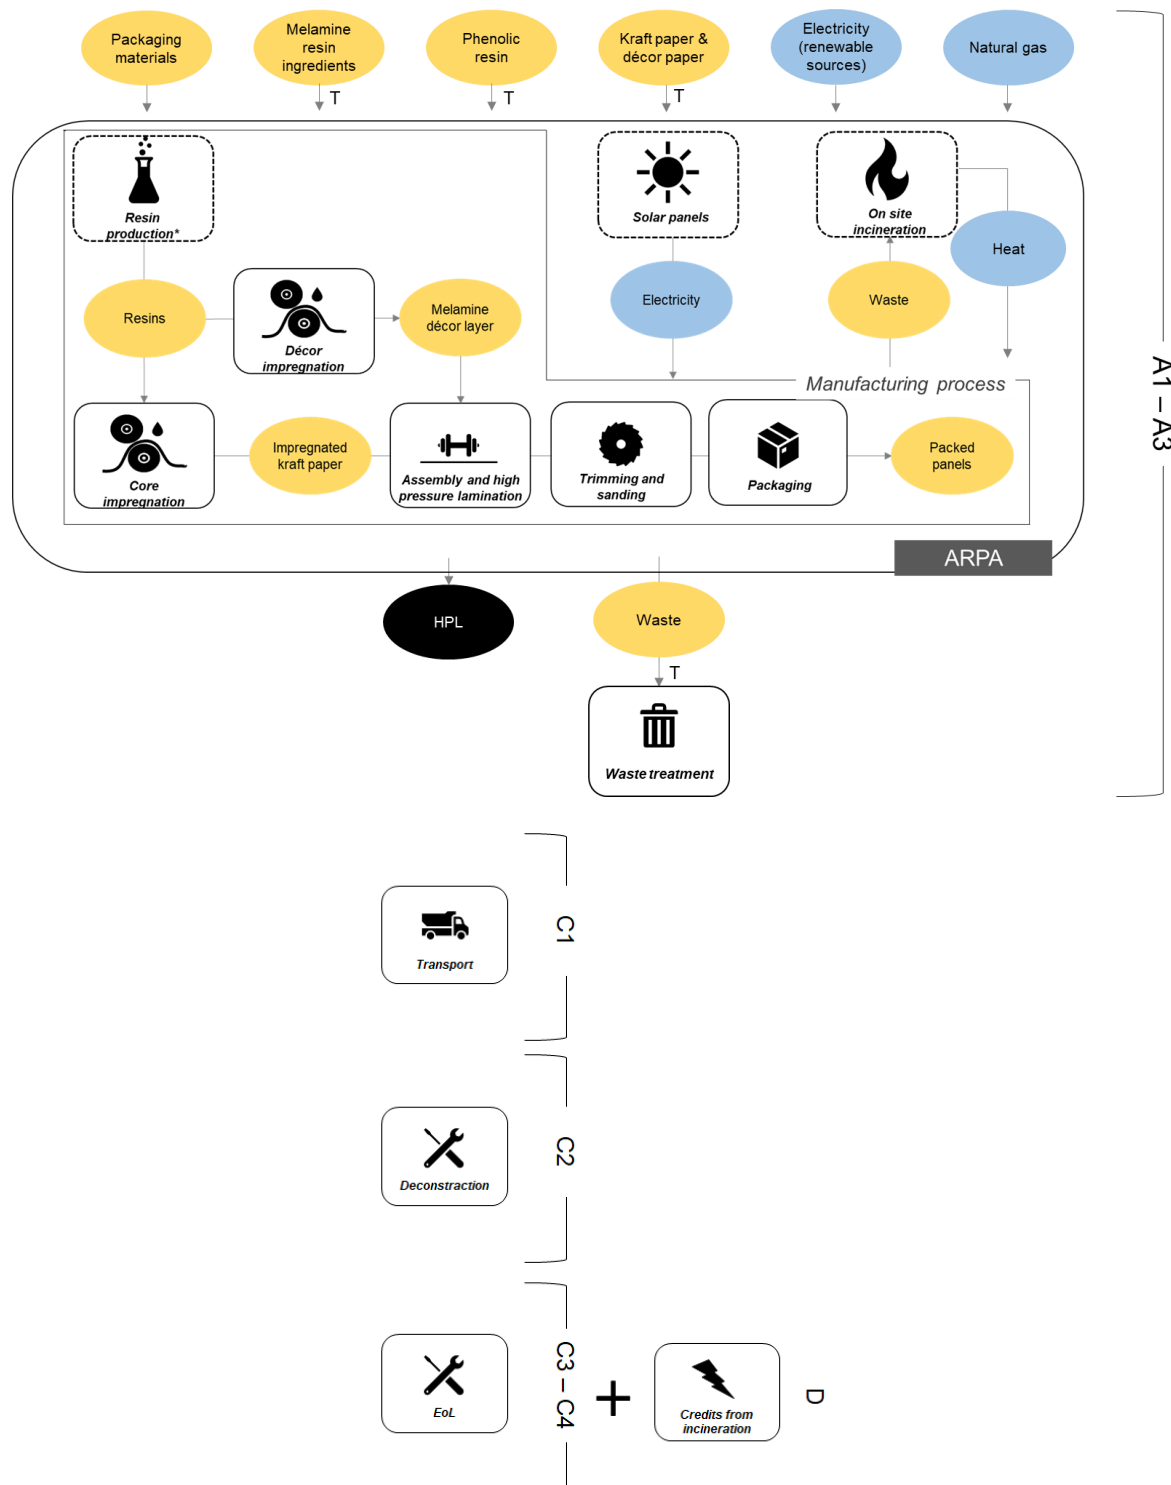


Figure 1: System boundary diagram for Arpa HPL black core 0.9mm. T = transport

More information:

Name and contact information of LCA practitioner: i.akal@nemho.com; s.corrado@nemho.com

Name of the organisation carrying out the underlying study: Nemho Innovation B.V.

Modelling of electricity in module A3: according to the specific electricity mix purchased by Arpa, which corresponds to 100% renewable energy, specifically from hydropower (30,9%), solid biomass (18,8%), bioliquids (41,4%), and solar energy (8,9%). The impact on climate change of 1 kWh is 8.84E-2 kgCO_{2eq}.

Main assumptions adopted in the study:

- Secondary data are taken from the database ecoinvent v 3.8 and Carbon Minds. In the selection of secondary data, priority is given to more representative data in terms of temporal coverage, geographical coverage, and production technology.
- When the supplier of a raw material is known, specific transport distances from the supplier to the factory are considered in the study, otherwise transport is modelled according to average transport distances reflecting the market mix.
- The transport of packaging materials is excluded from the system boundary.
- A default distance of 50 km and 100 km is considered for the transport respectively of manufacturing waste and wasted HPL panels to the waste facility.

End of life scenario for HPL panels:

HPL panels are commonly used as secondary material for energy recovery, therefore it is assumed that 100% of the HPL panel at the end of life are sent to incineration. Loads from material incineration and resulted energy credits for both electricity and heat are declared. Energy credits are calculated considering a lower heating value (LHV) of panels equal to 19 MJ/kg as declared by ICDLI (2015) and an efficiency of incineration respectively equal to 20% for electricity and 40% for heat.

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	EU	ND	ND	ND	ND	ND	ND	ND	ND	ND	GLO	GLO	GLO	GLO	GLO
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - products	Not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - sites	Not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-

Content information

Product components	Weight, kg	Post-consumer material, weight-%	Renewable material, weight-%
Phenolic resin	0,336 ± 0,007	0%	0%
Kraft paper	0,702 ± 0,014	0%	100%
Melamine resin	0,100 ± 0,002	0%	0%
Décor paper	0,100 ± 0,002	0%	100%
TOTAL	1,238 ± 0,025	0%	65%
Packaging materials	Weight, kg	Weight-% (versus the product)	
PP film	0,006	0,5%	
PE film	0,009	0,7%	
Boxboard	0,001	0,1%	
Cardboard boxes	0,001	0,1%	
Ledorex ®	0,007	0,6%	
TOTAL	0,024	1,9%	

Dangerous substances from the candidate list of SVHC for Authorisation

Arpa HPL panels do not contain substances listed on the candidate list of Substances of Very High Concern, as published on the ECHA website, in concentrations exceeding 0.1 percentage by mass.

Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	3,78E+00	7,82E-02	1,11E-02	1,02E+00	0,00E+00	-1,24E+00
GWP-biogenic	kg CO ₂ eq.	-1,88E+00	0,00E+00	0,00E+00	1,88E+00	0,00E+00	0,00E+00
GWP-luluc	kg CO ₂ eq.	3,90E-03	1,43E-04	4,04E-06	1,01E-05	0,00E+00	-1,29E-03
GWP-total	kg CO ₂ eq.	1,90E+00	7,84E-02	1,11E-02	2,90E+00	0,00E+00	-1,24E+00
ODP	kg CFC 11 eq.	7,35E-07	2,58E-09	2,68E-09	3,12E-09	0,00E+00	-1,02E-07
AP	mol H ⁺ eq.	1,56E-02	3,86E-04	5,66E-05	5,43E-04	0,00E+00	-3,60E-03
EP-freshwater	kg PO ₄ ³⁻ eq.	4,07E-03	1,13E-04	2,15E-06	2,33E-05	0,00E+00	-1,64E-03
EP-freshwater	kg P eq.	1,33E-03	3,67E-05	7,00E-07	7,58E-06	0,00E+00	-5,35E-04
EP-marine	kg N eq.	3,68E-03	7,37E-05	1,94E-05	3,14E-04	0,00E+00	-6,33E-04
EP-terrestrial	mol N eq.	3,96E-02	7,38E-04	2,13E-04	2,86E-03	0,00E+00	-5,79E-03
POCP	kg NMVOC eq.	1,12E-02	1,99E-04	6,35E-05	7,20E-04	0,00E+00	-1,89E-03
ADP-minerals&metals*	kg Sb eq.	1,58E-05	1,02E-07	2,58E-08	8,13E-08	0,00E+00	-2,09E-06
ADP-fossil*	MJ	6,53E+01	1,02E+00	1,75E-01	1,87E-01	0,00E+00	-2,18E+01
WDP	m ³	1,94E+00	1,25E-02	6,03E-04	6,55E-03	0,00E+00	-1,29E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption						

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Potential environmental impact – additional mandatory and voluntary indicators

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	3,73E+00	7,68E-02	1,11E-02	1,02E+00	0,00E+00	-1,22E+00
PM**	Disease incidences	1,38E-07	2,93E-09	1,34E-09	3,67E-09	0,00E+00	-1,18E-08
IRP**	kBq U235 eq.	2,31E-01	1,16E-02	8,85E-04	9,54E-04	0,00E+00	-3,07E-01
ETP-fw**	CTUe	4,43E+01	1,39E+00	1,37E-01	3,91E+00	0,00E+00	-9,62E+00
HTP-c**	CTUh	2,56E-09	1,75E-11	3,78E-12	4,49E-10	0,00E+00	-2,91E-10
HTP-nc**	CTUh	2,80E-08	6,70E-10	1,50E-10	4,66E-09	0,00E+00	-6,62E-09
SQP**	dimensionless	1,94E+02	1,50E-01	2,00E-01	8,48E-02	0,00E+00	-1,98E+00
Acronyms	PM= Particulate matter emissions; IRP= Ionizing radiation, human health; ETP-fw= Eco-toxicity – freshwater; HTP-C= -Human toxicity, cancer effect; HTP-nc= Human toxicity, non-cancer effects; SQP= Land use related impacts/Soil quality						

Potential environmental impact – additional mandatory and voluntary indicators. Results for North America calculated according to ISO 21930

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
GWP (ISO 21930)	kg CO ₂ eq.	3,69E+00	7,59E-02	1,10E-02	1,02E+00	0,00E+00	-1,20E+00
ODP (ISO 21930)	kg CFC-11 eq.	7,70E-07	3,09E-09	2,83E-09	3,24E-09	0,00E+00	-1,07E-07
EP (ISO 21930)	kg N eq	1,25E-02	2,85E-04	1,12E-05	1,10E-03	0,00E+00	-4,10E-03
AP (ISO 21930)	kg SO ₂ eq	1,28E-02	3,30E-04	5,01E-05	4,94E-04	0,00E+00	-2,98E-03
POCP (ISO 21930)	kg NMVOC eq.	1,81E-01	4,16E-03	1,23E-03	1,55E-02	0,00E+00	-3,22E-02
Acronyms	GWP (ISO 21930)= Global Warming Potential calculated with TRACI; ODP (ISO 21930)= Ozone Depletion Potential calculated with TRACI; EP (ISO 21930)= Eutrophication Potential calculated with TRACI; AP (ISO 21930)= Acidification Potential calculated with TRACI; POCP (ISO 21930)= Photochemical oxidant creation potential calculated with TRACI						

** Disclaimer the results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Use of resources

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
PERE	MJ	3,64E+01	1,17E-01	2,23E-03	1,08E-02	0,00E+00	-1,96E+00
PERM	MJ	1,14E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	4,78E+01	1,17E-01	2,23E-03	1,08E-02	0,00E+00	-1,96E+00
PENRE	MJ	3,84E+01	1,02E+00	1,75E-01	1,87E-01	0,00E+00	-2,18E+01
PENRM	MJ	2,69E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	6,53E+01	1,02E+00	1,75E-01	1,87E-01	0,00E+00	-2,18E+01
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	1,10E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,48E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	5,24E-02	5,68E-04	2,08E-05	7,09E-04	0,00E+00	-9,51E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water						

Waste production and output flows

Waste production

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed	kg	7,04E-03	3,73E-04	9,65E-06	6,48E-02	0,00E+00	-1,66E-03
Non-hazardous waste disposed	kg	4,13E-01	4,94E-03	1,64E-02	2,69E-02	0,00E+00	-4,25E-02
Radioactive waste disposed	kg	1,94E-04	3,16E-06	1,18E-06	5,40E-07	0,00E+00	-8,40E-05

Output flows

Results per functional or declared unit							
Indicator	Unit	Tot.A1-A3	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	4,90E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	3,01E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,52E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,11E+01

Information on biogenic carbon content

Results per functional or declared unit		
BIOGENIC CARBON CONTENT	Unit	QUANTITY
Biogenic carbon content in product	kg C	0.51
Biogenic carbon content in packaging	kg C	Not considered

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂.

Additional information

Reducing the carbon footprint is a key part of our overall sustainability policy and it is based on our core belief that it is the right thing to do. We are also convinced that reducing our overall environmental footprint is essential to the long-term success of our business and the environment around us. That is why sustainability is embedded in our business philosophy with the credo 'do no harm, do good, do better.'

At the core of our sustainability strategy is the principle that we should start with ourselves when we seek to improve the world: 'do no harm.' Our approach is straightforward: we measure our impact, select targets to reduce this impact and monitor and report on progress. To measure our impact, we use the Life Cycle Assessment (LCA) methodology.

The second element of our strategy is to look for opportunities that support the environment beyond the direct scope of our own manufacturing footprint: 'do good.' This includes creating highly durable products that have a long lifespan that limit the need for replacement. Additionally, we will develop projects that absorb or reduce carbon emissions that are not directly linked to our factories or product portfolio. We believe that addressing sustainability challenges will allow our company to continue to grow and 'do better' in the future. Investing in sustainability should – in the end – ensure that these efforts go beyond established regulatory requirements and the net effect of our efforts will positively impact the environment in which we operate.

Further details on our philosophy, approach and goals can be found in our position paper available online.

References

- General Programme Instructions of the International EPD® System. Version 3.01.
- PCR 2019:14. CONSTRUCTION PRODUCTS. VERSION 1.11
- EN 438-2:2016 High-pressure decorative laminates (HPL).
- EN 15804:2012+A2 Sustainability of construction works – Environmental product declarations - Core rules for the product category of construction products.
- ICDLI (2015). Technical characteristics and physical properties of HPL (Technical leaflet).
- ISO (2017): ISO 21930:2017, Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services

